# Diffusori a parete
## *Wall louvers*

**BTOCC**
**BTVCC**

### Bocchetta di transito con cornice e controcornice
***Door grilles with frame and auxiliary frame***

#### CARATTERISTICHE
Sono utilizzate per effettuare il riciclo dell'aria attraverso le porte. La particolare aletta sagomata a V impedisce la vista attraverso la griglia.
La finitura in satinato chimico anodizzato garantisce una migliore resistenza alla corrosione e viene effettuata ad assemblaggio ultimato

#### Materiale
Alluminio estruso.
Su richiesta in acciaio inox.

#### Finitura
Anodizzato naturale.
Altre finiture a richiesta.

#### Fissaggio
Ad incasso per installazione su porte con spessore da 35 a 60 mm.
Disponibile variante per installazione su porte con spessore da 25 a 40 mm (a richiesta)

#### *CHARACTERISTICS*
*Are utilized to assure the recycled air by doors. Particular "V" shape louvers prevents view across the grille.*

#### *Material*
*Extruded aluminium.*
*On request build at inox.*

#### *Finishing*
*Natural anodize.*
*Other finishing on request.*

#### *Fixing*
*Built-in for door installation from 35 to 60 mm thickness.*
*Available version for door installation from 25 to 40 mm thickness.*

**BTOC**
Alette parallele al lato lungo con cornice
*Louvers parallel to long side*

**BTOCC**
Alette parallele al lato lungo con controcornice
*Louvers parallel to long side with auxiliary frame*

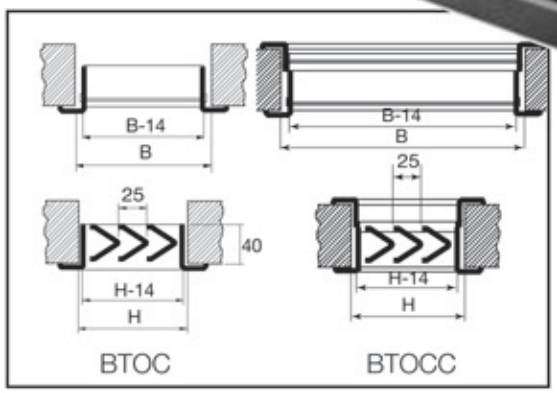


**BTVC**
Alette parallele al lato corto con cornice
*Louvers parallel to short side*
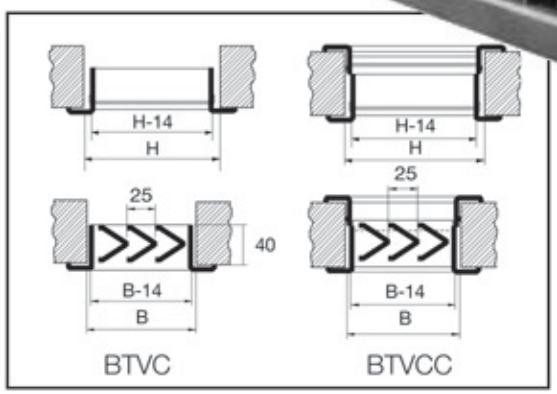
**BTVCC**
Alette parallele al lato corto con controcornice
*Louvers parallel to short side with auxiliary frame*